

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

76252

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

09/319811

INTERNATIONAL APPLICATION NO.
PCT/EP97/05417INTERNATIONAL FILING DATE
26/09/97PRIORITY DATE CLAIMED
12/12/96

TITLE OF INVENTION

SEISMIC WAVE SIMULATION APPARATUS

512 Rec'd PCT/PTO 11 JUN 1999

APPLICANT(S) FOR DO/EO/US

Carlo Albertini and Kamel Labibes

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
- ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
- ☒ A copy of the International Search Report (PCT/ISA/210).
- ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☒ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
- ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
- ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
- ☒ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
- ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

Items 13 to 18 below concern document(s) or information included:

13. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
A **SECOND** or **SUBSEQUENT** preliminary amendment.
16. ☐ A substitute specification.
17. ☐ A change of power of attorney and/or address letter.
18. ☒ Certificate of Mailing by Express Mail
19. ☒ Other items or information:

Post card for acknowledging receipt in USPTO

I hereby certify that this paper
is being deposited with the United States
Postal Service as Express Mail in an
envelope addressed to Assistant Commissioner for
Patents, Washington, D.C. 20231 on this date.

6-11-99

Date

Express Mail Label No.

EM 509795531 US

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

09/319811

INTERNATIONAL APPLICATION NO.

PCT/EP97/05417

ATTORNEY'S DOCKET NUMBER

76252

20. The following fees are submitted:

BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :

- ☒ Search Report has been prepared by the EPO or JPO **\$840.00**
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) **\$670.00**
- ☐ No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)) **\$760.00**
- ☐ Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO **\$970.00**
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4) **\$96.00**

ENTER APPROPRIATE BASIC FEE AMOUNT =**CALCULATIONS PTO USE ONLY****\$840.00**

Surcharge of **\$130.00** for furnishing the oath or declaration later than ☐ 20 ☒ 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).

\$130.00

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	16 - 20 =	0	x \$18.00
Independent claims	2 - 3 =	0	x \$78.00

\$0.00**\$0.00**Multiple Dependent Claims (check if applicable). ☐**\$0.00****TOTAL OF ABOVE CALCULATIONS =****\$970.00**

Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable). ☐

\$0.00**SUBTOTAL =****\$970.00**

Processing fee of **\$130.00** for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (f)). ☐ +

\$0.00**TOTAL NATIONAL FEE =****\$970.00**

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). ☐

\$0.00**TOTAL FEES ENCLOSED =****\$970.00**

Amount to be:	\$
refunded	
charged	\$

☒ A check in the amount of **\$970.00** to cover the above fees is enclosed.

Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees.
A duplicate copy of this sheet is enclosed.

☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. **23-0920** A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Richard L. Wood, Esq.
WELSH & KATZ, LTD.
120 South Riverside Plaza - 22nd Floor
Chicago, IL 60606

Richard L. Wood
SIGNATURE

Richard L. Wood
NAME

22,839

REGISTRATION NUMBER

June 11, 1999

DATE

09/319811

80 Rec'd PCT/PTO 11 JUN 1999

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants: Carlo Albertini
Kamel Labibes

Group No.:

Serial No.:

Examiner:

Filed: June 11, 1999

For: SEISMIC WAVE SIMULATION
APPARATUS
(Based on International
Application No. PCT/EP97/05417)

I hereby certify that this paper is being
Deposited with the United States Postal Service
as Express Mail in an envelope addressed to:
Assistant Commissioner for Patents,
Washington, DC 20231, on this date:

6/11/99

Date

Express Mail No.

EM509795531US

Attorney

Docket No.: 76252

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, DC 20231

Sir:

Applicants, through their undersigned attorneys, amend their above-identified U.S. National patent application as follows. The following amendments are being made to the claims filed in the subject U.S. National application that correspond to the claims in the International application as amended in the International application. It is respectfully requested that this Preliminary Amendment be entered prior to calculating the basic fees for the U.S. National application.

In the Claims:

Claim 1, delete all reference numbers and letters shown in parenthesis along with the corresponding parenthesis;

Claim 1, line 13, change "characterising" to --characterized--.

Claim 2, delete all of the reference numerals and letters shown in parenthesis and also delete the corresponding parenthesis.

Claim 3, line 1, delete "(4a)".

Claim 4, line 2, delete "(6)", and in line 3, delete "(4a)".

Claim 5, line 1, delete "or Claim 4";

Claim 5, lines 2, 3, 4, 5, 6 and 7, delete all reference numerals and letters shown in parenthesis and also delete the corresponding parenthesis.

Claims 6-9, delete all of the reference numerals and letters shown in parenthesis and also delete the corresponding parenthesis.

Claim 10, line 1, change "any one of the preceding claims" to --Claim 1--;

Claim 10, line 3, delete "(4)" and "(5)".

Claim 11, lines 1 and 2, change "any one of the preceding claims" to --Claim 1--, and delete "(8)".

Claim 12, line 2, delete "(8)".

Claim 13, lines 1 and 2, change "any one of the preceding claims" to --Claim 1--, and delete "(11)".

Claim 14, lines 1 and 2, change "any one of the preceding claims" to --Claim 1--, and delete "(9)".

Claim 15, lines 1 and 2, change "any one of the preceding claims" to --Claim 1--;

Claim 15, line 3, delete "(10)".

Claim 16, line 3, after "including" insert --the steps of--;

Claim 16, lines 4 and 10, delete the reference numerals shown in parenthesis and also delete the corresponding parenthesis;

Claim 16, line 15, change "characterised" to --characterized--;

Claim 16, line 15, change "soshaped" to --so shaped--.

In the Specification:

Please add the following Abstract of the Disclosure to follow the claims in the subject U.S. National application.


--Abstract of the Disclosure

A seismic wave simulation apparatus and method capable of generating a simulated seismic wave in a geological specimen, including an elastic energy accumulator shaped to deliver a seismic wave of known amplitude and duration to the geological specimen under test. The elastic energy accumulator includes an impactor member held, in use, adjacent the geological test specimen and supported to resist movement in a direction away from the specimen when the elastic energy accumulator is preloaded in said direction by a hydraulic or pneumatic actuator. In use, the preload force can be quelled suddenly, for example, by triggering an explosive bolt so that the impactor member is released into impact or energy transfer with the geological specimen thereby transmitting a seismic wave to the geological specimen. Transducers are arranged to measure the mechanical behavior across the section of the geological specimen through which a seismic wave is being transmitted. --

It is again respectfully requested that the above amendments be made to applicants' the U.S. National application prior to calculating the filing fees. Favorable consideration of the application, as now presented, is earnestly solicited.

Respectfully submitted,

WELSH & KATZ, LTD.

By 
Richard L. Wood
Registration No. 22,839

June 11, 1999
WELSH & KATZ, LTD.
120 South Riverside Plaza
22nd Floor
Chicago, IL 60606
Phone: (312) 655-1500
Fax: (312) 655-1501

WELSH & KATZ, LTD.

1

80 Rec'd PCT/PTO

11 JUN 1999

SEISMIC WAVE SIMULATION APPARATUS

This invention relates to seismic wave simulation apparatus more particularly but not exclusively for
5 simulating earthquake phenomena occurring in soil and in a foundation embedded in the soil, which foundation may be for example, part of a building.

Conventionally, simulation of a seismic wave or
10 earthquake in a structure or building is done by means of a pseudo-dynamic test (reaction wall) or by the "shaking" table. In order to simulate seismic waves or earthquakes occurring in soil, explosives are used which tend to be inconvenient since the explosives do not generate waves of
15 known energy content and shape and duration having characteristics of earthquakes. Thus, using such methods to simulate seismic waves or earthquakes does not allow wave propagation laws and effects to be properly established through seismic wave simulation in soil or
20 other structures.

EP-A-7740 discloses an apparatus for performing dynamic tests on large structures which comprises an energy accumulator in the form of a loading cable for applying a
25 force to a test piece, a hydraulic jack for tensioning the cable, a structure for anchoring the cable, a stopping and releasing device operable to secure the cable before a test and, after tensioning of the cable, to release the cable so that it propagates a wave to the test piece, a recoil
30 shock-absorber and a device for limiting lateral oscillations of the cable.

This apparatus is, however, not suitable for
simulating seismic waves because the cable is only capable
35 of generating a tension wave of constant amplitude which is not representative of a seismic wave because seismic waves have complex wave forms with a changing amplitude.

It is an object of the present invention to provide

an apparatus which is capable of simulating complex seismic waves.

According to the present invention there is provided
5 a seismic wave simulation apparatus for generating a simulated seismic wave in a geological specimen, which comprises an elastic energy accumulator comprising a member arranged, in use, to act on the geological test specimen and supported to resist movement in a direction away from
10 the specimen when the elastic energy accumulator is preloaded in said direction by actuator means, the arrangement being such that, in use, the preload force can be quelled suddenly, for example by triggering an explosive bolt, so that the member is released into impact or energy
15 transfer with the geological specimen thereby transmitting a seismic wave to the geological specimen, characterised in that the elastic energy accumulator member has a number of sections of different diameters.

20 By providing the energy accumulator member with sections of different diameters the member is so shaped as to simulate a seismic wave of known characteristics in order that wave propagation laws and effects can be properly established.

25 Preferably the elastic energy accumulator member has a number of co-axial cylindrical sections of different diameters of which the section at the end of the member remote from the actuator means constitutes an impactor
30 which, in use, is held adjacent the geological specimen under test so as to impact the specimen on release of the member.

In one embodiment of the present invention, the
35 elastic energy accumulator includes seven cylindrical sections of different diameter. Preferably, one of those sections nearest the actuator means has the smallest diameter of the sections and, where an explosive bolt is

provided as aforementioned, to release the impact energy said explosive bolt is, preferably, provided in this section and preferably is disposed diametrically of said section. Said smallest diameter section may adjoin a large
5 diameter section which is connected to two further sections stepped down in diameter and connected in turn to a smaller diameter section which is larger than said smallest section adjacent the actuator means. This smaller diameter section may be connected to two larger sections which are stepped
10 up in diameter, the last of these sections constituting the impactor to be located adjacent to the geological specimen in use. The length of the elastic energy accumulator (comprised of said seven sections) and the actuator means may be in the order of 500 metres.

15

The accumulator member may be supported to resist movement in a direction away from the geological specimen under test by said last-mentioned section. A blocking system or fixed support may be provided at the rear of said
20 last-mentioned section surrounding the penultimate section, thereby resisting or preventing movement of the accumulator member in said direction on the application of the preload force.

25

Usually, the apparatus will include transducers arranged to measure, in use, the mechanical behaviour across the section of the geological specimen through which a seismic wave is being transmitted.

30

Preferably, the transducers are in the form of bars or elongate members arranged in a direction parallel to the direction of propagation of the seismic wave. Seismic sensors may also be included extending at an angle or transversely of the direction of propagation of the wave.

35

Preferably, in order to obtain measurements regarding local displacements of the soil in the geological specimen,

said apparatus may include a thin metallic or conductive sheet to be fixed to the surface of the geological specimen (for example by cement) and connected to measuring instrumentation such as a Wheatstone bridge, for example, in order to obtain superficial strain measurement. In carrying out the test a building foundation or the like may be embedded in the geological specimen in order to investigate the interaction between the soil and foundation on the application of a simulated seismic wave.

The measuring instrumentation may include accelerometers.

Further according to the present invention there is provided a method of inducing or generating a simulated seismic wave in a test specimen, for example a geological specimen, said method including providing an elastic energy accumulator comprising a member which is arranged to act on the specimen so as to deliver a seismic wave to the specimen, supporting the elastic energy accumulator to resist movement in a direction away from the specimen and preloading the elastic energy accumulator in said direction, suddenly quelling the preload force, for example by triggering an explosive bolt in the elastic energy accumulator, thereby releasing the elastic energy accumulator into impact or energy transfer with said specimen thereby transmitting a simulated seismic wave to the specimen, collecting data from the specimen and analysing said data, characterised in that the energy accumulator member is so shaped by providing it with a number of sections of different diameters that it delivers a seismic wave of known amplitude and duration.

Further advantageous apparatus and method features of the present invention will be evident from the following description and drawings.

An embodiment of seismic wave simulation apparatus

for generating a seismic wave in a geological specimen will now be described, by way of example only, with reference to the accompanying simplified diagrammatic drawings in which:

5 FIGURE 1 shows the seismic wave simulation apparatus adjacent a geological specimen having the foundation of a building embedded therein;

10 FIGURE 2 shows a simple cylindrical bar pre-loaded to yield a virtually rectangular stress wave, and

 FIGURE 3 shows cylindrical bars of two different sections arranged to yield a different stress wave pattern.

15 FIGURE 1 of the drawings shows schematically seismic wave simulation apparatus 1 positioned to the left of a geological specimen 2 in which is embedded the foundation 3 of a building (not shown). The seismic wave simulation apparatus has an elastic energy accumulator 4 comprising an
20 impactor member which can be preloaded in tension in a direction away from the geological specimen 2 (i.e. in a direction reverse to arrow A) by means of a hydraulic actuator 5. The apparatus 1 includes a blocking or support system which effectively fixes the right hand end of the

25

30

35

elastic energy accumulator 4 whilst said accumulator is preloaded in tension.

The elastic energy accumulator is specially shaped to simulate a seismic wave of known characteristics, such as the wave shown in the top left hand corner of FIGURE 1 in order that wave propagation laws and effects throughout the geological specimen 2 and foundation 3 can be properly established.

It is to be noted that the energy accumulator in the present instance includes seven sections 4a to 4g of varying diameter and the geometry of this energy accumulator may be modified in order to obtain different wave shapes of known characteristics.

FIGURE 1 shows only one such configuration where reflections can provide many wave shapes of different amplitude in tension and in compression. Section 4a of the energy accumulator 4 has the narrowest diameter and an explosive bolt 6 extends diametrically of the section.

It is to be understood that once the energy accumulator has been preloaded by the hydraulic actuator this energy can be released and transmitted as a seismic wave through the geological specimen 2 when the bolt 6 is exploded. In order to create wave propagation the energy stored in the energy accumulator 4 should be released suddenly. The explosive bolt 6 is the weak part of the energy accumulator and when this part is broken the energy is released. Usually, explosive will be inserted inside the bolt which allows said bolt to rupture in a very brief time in order to obtain a stress wave with a short rise time.

The right hand end section 4g of the energy accumulator has a rear face 4g' which engages the front face 7' of the blocking or support system 7 when the

hydraulic actuator 5 places the energy accumulator 4 under preload conditions, in a manner which should be evident from the drawings.

- 5 The manner in which the geometry of the energy accumulator 4 may be modified in order to obtain particular wave shapes is explained below. The duration of the wave is a function of the length of the energy accumulator and the amplitude can be determined by modifying the acoustic
10 impedance along the energy accumulator 4.

Estimation of the stress wave values between two long bars with different acoustic impedance.

- 15 It can be shown that the amplitude of the stress σ in the case of stress wave propagation is a linear function of the particle velocity V :

$$\sigma = \rho \cdot C \cdot V. \quad (1)$$

- 20 ρ is the density of the medium (bar)
 C is the wave velocity.

- This equation can be used to estimate the wave transmission and reflection through the interfaces of two bars in
25 contact with a different acoustical impedance. In this case two conditions should be satisfied:

The loads at the interface between the two bars are equal at each instant:

- 30 $A(\sigma_i + \sigma_r) = A \cdot \sigma_t \quad (2)$
 A is the cross sectional area of the bar at the interface.

- The particle velocities at the interface between the two
35 bars are equal at each instant:

$$V_i = V_r + V_t \quad (3)$$

By using equation (1) in equation (2) we obtain that:

$$A_1 (\rho_1 C_1 V_i) + A_1 (\rho_1 C_1 V_r) = A_2 (\rho_2 C_2 V_t) \quad (4)$$

5 with equation 3 we obtain that:

$$V_r = \frac{A_2 \rho_2 C_2 - A_1 \rho_1 C_1}{A_2 \rho_2 C_2 + A_1 \rho_1 C_1} V_i \quad (5)$$

10 and

$$V_t = \frac{2A_1 \rho_1 C_2}{A_2 \rho_2 C_2 + A_1 \rho_1 C_1} V_i \quad (6)$$

By writing these equations for stresses we have:

$$\sigma_2 = \frac{A_2 \rho_2 C_2 - A_1 \rho_1 C_1}{A_2 \rho_2 C_2 + A_1 \rho_1 C_1} \sigma_i \quad (7)$$

$$\sigma_t = \frac{2A_1 \rho_2 C_2}{A_2 \rho_2 C_2 + A_1 \rho_1 C_1} \sigma_i \quad (8)$$

If a bar is preloaded with an acoustic impedance $\rho_1 A_1 C_1$ the stress wave generated is nearly rectangular (FIGURE 2).

30 This application could be the starting point to understand the basic behaviour of wave propagation in the soil and will permit the validation of the calcul codes used to describe the earthquake phenomena.

35 Two cylindrical bars with two different sections (as shown in FIGURE 3) and a longitudinal stress wave which propagates from one end of the left bar can now be considered. If the acoustic impedance $\rho_1 C_1 A_1 > \rho_2 A_2 C_2$ then

we obtain a wave which decreases in function of time.

The amplitude and the shape of the wave generated can be found knowing the impedance and also the length of the bars to obtain the transit time. Using the above formula in a numerical programme it is possible to know the shape of the wave which could be generated in function of the geometry of the energy accumulator.

10 The geological specimen 2 may be a soil rocks specimen and, in order to measure the mechanical behaviour across the section of the geological specimen, transducer bars 8 are provided in the specimen as shown in FIGURE 1. The transducer bars 8 are instrumented with strain gauges and measurements taken in a generally known manner. 15 Additionally, in order to obtain measurements regarding local displacements of the soil in the geological specimen 2 an electrified metallic thin sheet 9 is fixed firmly to the surface of the soil by a cement and connected up to a measuring instrumentation such as a Wheatstone bridge, in the case of resistance strain gauges, in order to obtain superficial strain measurement. 20

Thus, in the present instance, a simulated seismic wave can be transmitted through the geological specimen 2 and through a building foundation 3, so interaction between the soil and the foundation can be studied and evaluated. 25

Any other measuring instrumentation may be provided such as the accelerometers 10 and embedded seismic sensor bar 11. 30

It is believed the seismic wave simulation apparatus 1 can be used to provide a deterministic approach to monitoring and predicting: 35

- (a) earthquakes,
- (b) large ground displacements of natural and artificial

origin;

- (c) explosion effects of mining work and large civil engineering works,
- (d) volcanic activity,
- 5 (e) the dynamic interaction between soil and structures.

This approach is based on the stress wave release and wave propagation measurements from or in fracturing rock specimens.

10

Furthermore, the seismic wave simulation wave apparatus allows different kinds of soils to be submitted to earthquake-like effects at large-scale, the interaction between soil and foundations to be studied. The apparatus
15 should allow precise measures of attenuation laws for acceleration, magnitude as a function of distance etc. since initial energy into the soil is well known and the measurement is performed without modification of the wave. Propagation laws and explosive waves for the optimisation
20 of mining and large excavation works could be tested and a large displacement could be reached (up to 5 metres) for an ELEA of 500 meters.

Advantageously, embodiments of the present invention
25 may provide:

- (1) A precision seismic load testing device of large geological specimens of homogeneous or composite nature reproducing a significant sample of the
30 earth crust in which propagation parameters (load, displacement, speed, accelerations) of seismic/explosive waves can be locally and globally measured.
- (2) Accumulation of a large amount of potential energy
35 released as a real seismic/explosive wave of well known shape, amplitude and duration by proper sizing of length and cross section of the ELEA allowing very large displacements without enormous complication of

inertial effects that would characterise, for example, a hydraulic machine.

(3) Bar transducers having a tuned mechanical impedance with the soil/rock specimen in order to capture without modification the seismic/explosive wave arising in the points of application.

(4) Bar transducers utilised as geotechnical transducers having the unique characteristic of the local contemporaneous direct measurement of load, displacement, speed and accelerations provoked by the seismic/explosive wave propagation because of their elasticity and length.

It is to be understood that the scope of the present invention is not to be unduly limited by a particular choice of terminology and that a specific term may be replaced by any equivalent or generic term. Further it is to be understood that individual features, method or functions relating to the seismic wave simulation wave apparatus might be individually patentably inventive. The singular may include the plural and vice versa. Additionally, any range mentioned herein for any variable or parameter shall be taken to include a disclosure of any derivable subrange within that range or any particular value of the variable or parameter range within, or at an end of, the range or subrange.

CLAIMS

1. Seismic wave simulation apparatus for generating a simulated seismic wave in a geological specimen, which
5 comprises an elastic energy accumulator (4) comprising a member arranged, in use, to act on the geological test specimen and supported to resist movement in a direction away from the specimen when the elastic energy accumulator is preloaded in said direction by actuator means (5), the
10 arrangement being such that, in use, the preload force can be quelled suddenly, for example by triggering an explosive bolt (6), so that the member is released into impact or energy transfer with the geological specimen thereby transmitting a seismic wave to the geological specimen,
15 characterised in that the elastic energy accumulator member (4) has a number of sections of different diameters (4a-g).

2. Apparatus as claimed in Claim 1 in which the elastic energy accumulator member (4) has a number of co-axial
20 cylindrical sections of different diameters (4a-g) of which the section (4g) at the end of the member remote from the actuator means (5) constitutes an impactor which, in use, is held adjacent the geological specimen under test so as to impact the specimen on release of the member.

25 3. Apparatus as claimed in Claim 2 having a section (4a) nearest the actuator means which is the smallest diameter of the sections.

30 4. Apparatus as claimed in Claim 3 including an explosive bolt (6) disposed diametrically of said smallest diameter section (4a).

5. Apparatus as claimed in Claim 3 or Claim 4 in which
35 said smallest diameter section (4a) adjoins a large diameter section (4b) which is connected to two further sections (4c,4d) stepped down in diameter and connected in turn to a smaller diameter section (4e) which is larger

than said smallest diameter section (4a) adjacent the actuator means (5).

6. Apparatus as claimed in Claim 5 in which said smaller diameter section (4e) is connected to two larger sections (4f,4g) which are stepped up in diameter, the last of these sections (4g) constituting the impactor to be located adjacent to the geological specimen in use.
7. Apparatus as claimed in Claim 6 in which the accumulator member (4) is supported to resist movement in a direction away from the geological specimen under test, by said last-mentioned section (4g).
8. Apparatus as claimed in Claim 7 in which a blocking system or fixed support is provided at the rear of said last-mentioned section (4g) surrounding the penultimate section (4f), thereby resisting or preventing movement of the accumulator member (4) in said direction on the application of the preload force.
9. Apparatus as claimed in Claim 1 in which the elastic energy accumulator (4) includes seven cylindrical sections of different diameters (4a-g).
10. Apparatus as claimed in any one of the preceding claims in which the combined length of the elastic energy accumulator (4) and the actuator means (5) is of the order of 500 metres.
11. Apparatus as claimed in any one of the preceding claims having transducers (8) arranged to measure, in use, the mechanical behaviour across the section of the geological specimen through which a seismic wave is being transmitted.
12. Apparatus as claimed in Claim 11 in which the transducers (8) are in the form of bars or elongate members

arranged in a direction parallel to the direction of propagation of the seismic wave.

13. Apparatus as claimed in any one of the preceding
5 claims in which seismic sensors (11) are included extending at an angle or transversely of the direction of propagation of the wave.


14. Apparatus as claimed in any one of the preceding
10 claims including a thin metallic or conductive sheet (9) to be fixed to the surface of the geological specimen (for example by cement) and connected to measuring instrumentation such as a Wheatstone bridge, for example, in order to obtain superficial strain measurement.

15. Apparatus as claimed in any one of the preceding claims in which the measuring instrumentation includes accelerometers (10).

20 16. A method of inducing or generating a simulated seismic wave in a test specimen, for example a geological specimen, said method including providing an elastic energy accumulator (4) comprising a member which is arranged to act on the specimen so as to deliver a seismic wave to the
25 specimen, supporting the elastic energy accumulator to resist movement in a direction away from the specimen and preloading the elastic energy accumulator in said direction, suddenly quelling the preload force, for example by triggering an explosive bolt (6) in the elastic energy
30 accumulator, thereby releasing the elastic energy accumulator into impact or energy transfer with said specimen thereby transmitting a simulated seismic wave to the specimen, collecting data from the specimen and analysing said data, characterised in that the energy
35 accumulator member is soshaped by providing it with a number of sections of different diameters that it delivers a seismic wave of known amplitude and duration.

1/2

FIG.1.

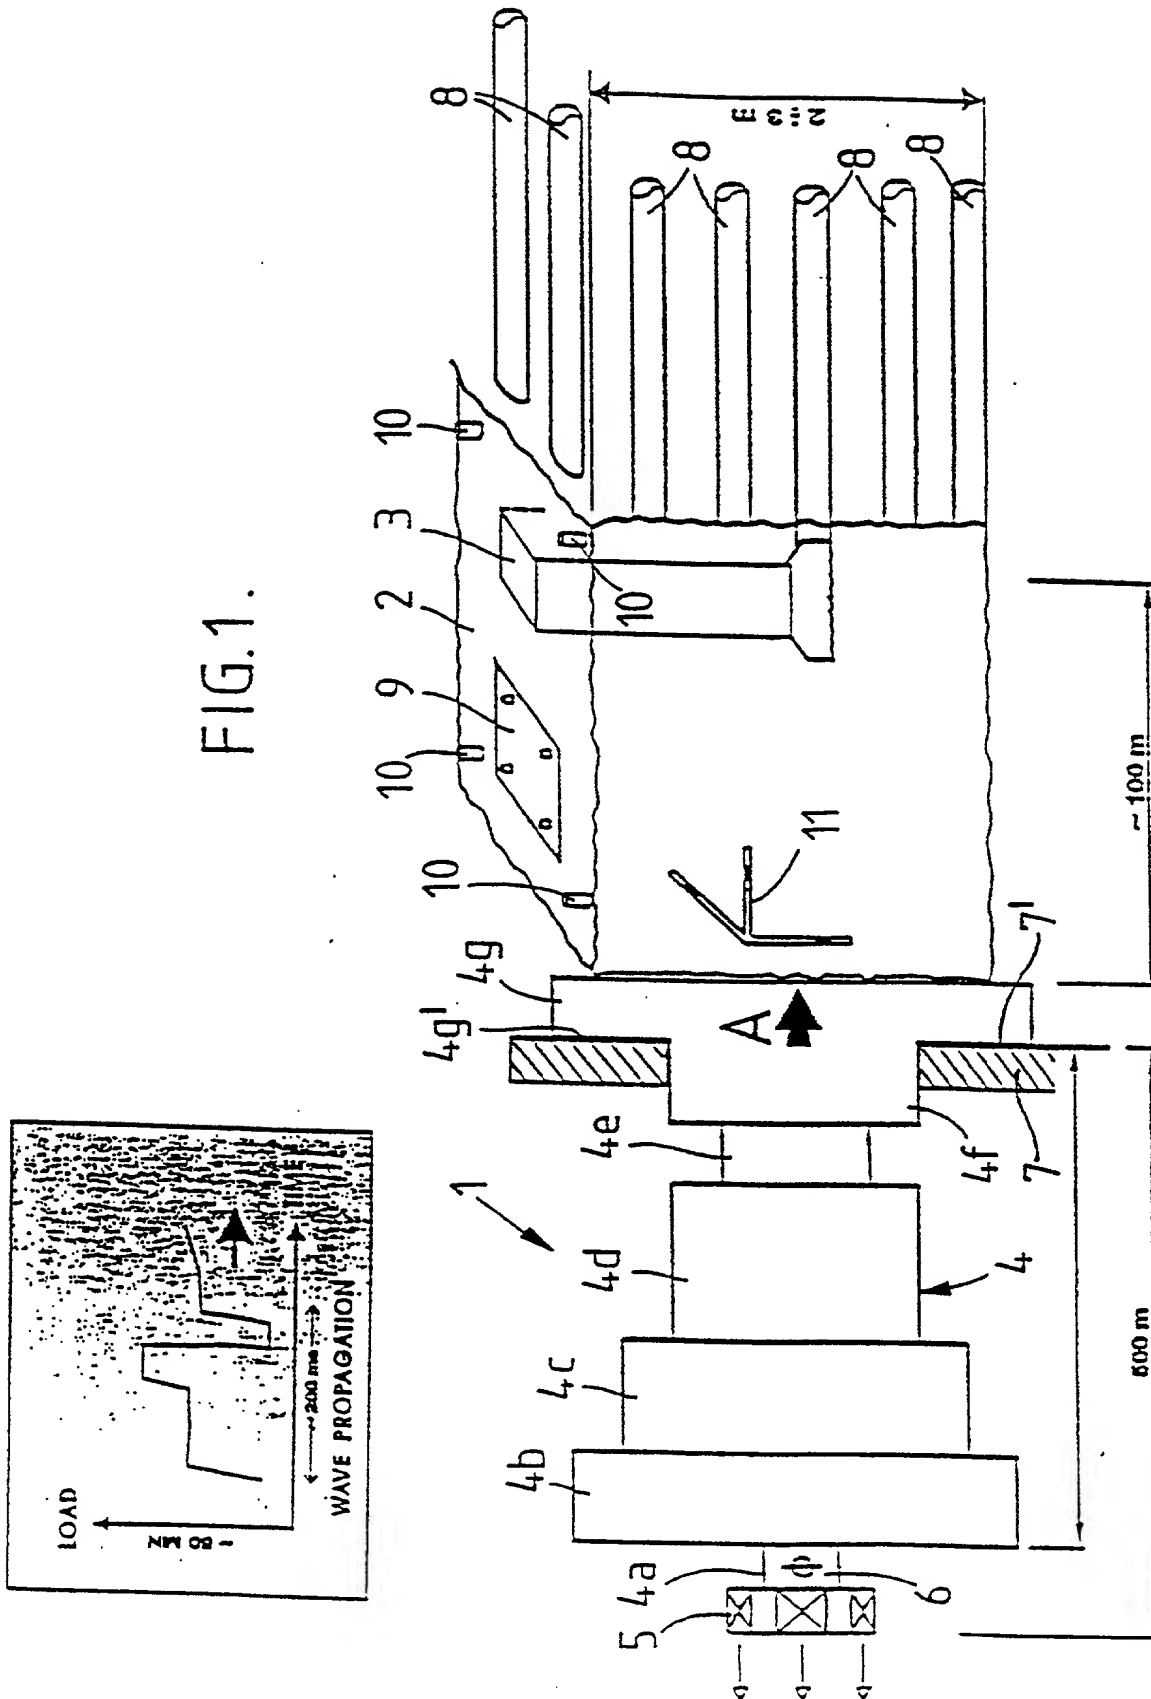

2/2

FIG. 2.


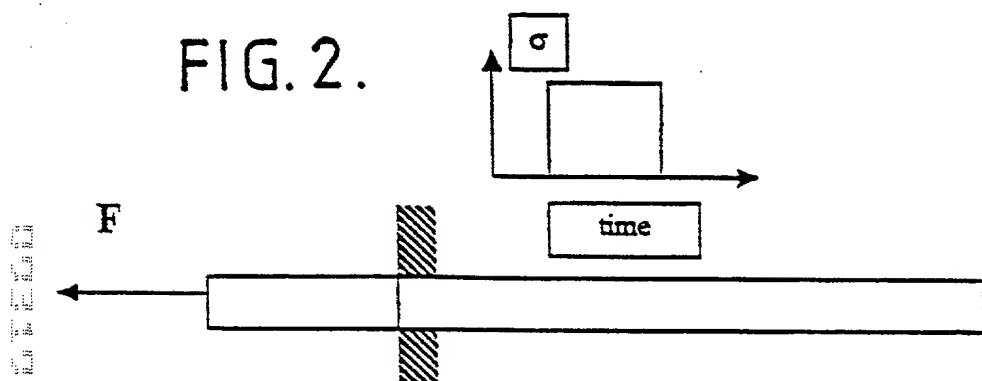


FIG. 3.



DECLARATION AND POWER OF ATTORNEY

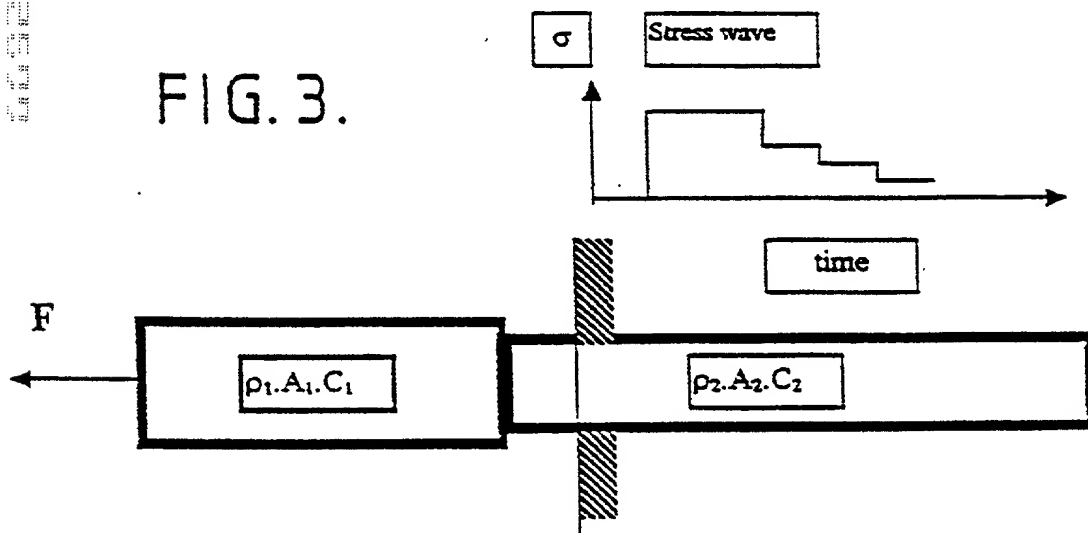

As a below named inventor, I hereby declare:

That my residence, post office address and citizenship are as stated below next to my name.

That I verily believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **SEISMIC WAVE SIMULATION APPARATUS**

the specification of which (check one)

- () is attached hereto.
() was filed on 11 June 1999 as
Application Serial No. 09/319,811
and was amended on _____
(if applicable)

That I have reviewed and understand the contents of the above-identified specification, including the claim, as amended by any amendment referred to above.

That I acknowledge the duty to disclose information known to be material to patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

That I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate on this invention having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

<u>PCT/EP97/05417</u>	<u>PCT</u>	<u>26 September 1997</u>
(Number)	(Country)	(Day/Month/Year Filed)
_____	_____	_____
(Number)	(Country)	(Day/Month/Year Filed)

Priority Claimed

<input checked="checked" type="checkbox"/>	<input type="checkbox"/>
Yes	No
<input type="checkbox"/>	<input type="checkbox"/>
Yes	No

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below.

_____ (Application Number)	_____ (Filing Date)
_____ (Application Number)	_____ (Filing Date)

That I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

United States Application(s)

_____ (Application Serial No.)	_____ (Filing Date)	_____ (Status)-(Patented, pending, abandoned)
_____ (Application Serial No.)	_____ (Filing Date)	_____ (Status)-(Patented, pending, abandoned)

That all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

I hereby appoint the following attorneys, with full power of substitution and revocation, to prosecute this application and to transact all business in the United States Patent and Trademark Office connected therewith and request that all correspondence and telephone calls in respect to this application be directed to WELSH & KATZ, LTD., 120 South Riverside Plaza, 22nd Floor, Chicago, Illinois 60606, Telephone No. (312) 655-1500:



Attorney

Registration No.

A. Sidney Katz
Richard L. Wood
Jerold B. Schnayer
Eric C. Cohen
Joseph R. Marcus
Gerald S. Schur
Gerald T. Shekleton
James A. Scheer
Daniel R. Cherry
Edward P. Gamson
Kathleen A. Rheintgen
Thomas W. Tolpin
Jon P. Christensen

24,003
22,839
28,903
27,429
25,060
22,053
27,466
29,434
29,054
29,381
34,044
27,600
34,137

Full name of sole or one
joint inventor:

Inventor's signature:

Date:

Residence and Post Office Address:

Citizenship:

Address for Correspondence:

CARLO ALBERTINI

Carlo Albertini

12/7/99

Via Dei Pini 17, 21027 Ispira (VA)

Italy

Italian

WELSH & KATZ, LTD.
120 South Riverside Plaza
22nd Floor
Chicago, Illinois 60606

ITX

Full name of additional
joint inventor, if any:

KAMEL LABIBES

Inventor's signature:

Date:

12.07.99

Residence and Post Office Address:

Via S. Isidoro 24, 21020 Angera (VA)

Italy

ITX

Citizenship:

French

Full name of additional
joint inventor, if any:

Inventor's signature:

Date:

Residence and Post Office Address:

Citizenship:

Full name of additional
joint inventor, if any:

Inventor's signature:

Date:

Residence and Post Office Address:

Citizenship: